



## ANDERSON GREENWOOD AMAL ERQB FLAME ARRESTER

An end-of-line long burn flame arrester designed to prevent the propagation of a flame



### FEATURES

- Fabricated construction.
- Replaceable element.
- Sprung weather cover.
- Advanced crimped stainless steel element construction as standard. Other materials available.
- Suitable for endurance burning.
- Independently tested and certified.
- Manufactured to ISO 9001:2008.

### GENERAL APPLICATION

The ERQB is mounted on tanks or on the end of discharge pipes to stop flames entering the process. It allows for stabilized burning for an unspecified time.

### TECHNICAL DATA

Materials:	Carbon steel, stainless steel
Sizes:	DN 15 to 350 (1/2" x 14")
Connections:	Threaded or flanged
Temperature range:	-20° to +60°C (-4° to +140°F)
Gas groups*:	IIA, IIB, IIB2, IIB3, IIC
Certification:	ATEX Directive 94/9/EC; PED 97/23/EC

\* Only available for hydrocarbon gas

# ANDERSON GREENWOOD AMAL ERQB FLAME ARRESTER

## STABILIZED BURNING

Stabilized burning is the steady burning of a flame stabilized at or close to the flame arrester element. The ERQB allows for stabilized burning for an unspecified time. A fusible link holds the weather cover in the normal position. During an endurance burn, extreme temperatures are generated which cause the fusible link to melt, eventually releasing the cover and allowing the heat to escape.

## MATERIALS AND CONNECTION OPTIONS

### Materials

Carbon steel and stainless steel.

### Connection pipe size

Threaded DN 15 to 50 (½" to 2")  
 Flanged DN 15 to 350 (½" to 14")

## NOTE

Accessories, special materials and connections are available on request.

## Gas groups

- IIA
- IIB1


Only available for hydrocarbon gas.

## NOTES

Some sizes of ERQB are supplied with multiple elements, which fit onto pipe arms extending from a central inlet pipe. These are suitable for endurance burning applications.

The largest diameter element used with ERQB is DN 200 (8"), inlet diameters DN 100 (4") and above all use this element and sizes DN 100 - 150 (4" - 6") have single elements whilst sizes above DN 150 (6") have multiple elements. Standard elements are double the pipe size.

ERQB ENDURANCE BURN (EC VERSION)

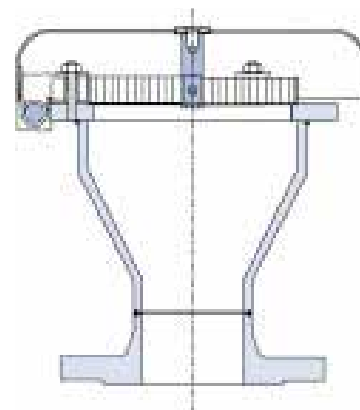

## HIGH TEMPERATURE (+200°C (+392°F)) APPLICATIONS

Explosion group	Gap width	Inlet size
IIB1 (IIA)	0.8 mm (0.032")	DN 15 - 350 (½" - 14")

# ANDERSON GREENWOOD AMAL ERQB FLAME ARRESTER

## SELECTION GUIDE

Example:	ERQB	50	EC	100	19	80	S3	S3
<b>Model</b>								
<b>ERQB</b>								
<b>Connection diameter, mm (in)</b>								
<b>Threaded</b>								
DN 15 to DN50 (½" to 2")								
<b>Flanged</b>								
DN 15 to DN 150 (½" to 6") – element sizes to DN 200 (8")								
DN 200 to DN 350 (8" to 14") – element sizes > DN 200 (8")								
<b>Element code</b>								
<b>EC</b>								
<b>Element diameter, mm (in)</b>								
DN 50 to DN 100 (2" to 4") – screwed connection								
DN 50 to DN 200 (1" to 8") – flanged connection								
DN 200 (8") multiples – flanged connection > DN 200 (8")								
<b>Element width, mm (in)</b>								
<b>19</b> 19 mm (0.75")								
<b>Cell height, mm (in)</b>								
<b>80</b> 0.80 mm (0.032")								
<b>Element material</b>								
<b>S3</b> Stainless steel								
<b>C</b> Carbon steel								
<b>Body material</b>								
<b>S3</b> Stainless steel								
<b>C</b> Carbon steel								

## NOTES

All sizing and selection must be conducted by the factory.