


1 FASE SCHEEPSTRANSFORMATOR

Volgens EN 61558-2.1 en UL

400/460 Volt AC, met +/- 20 Volt aanpassingsklemmen

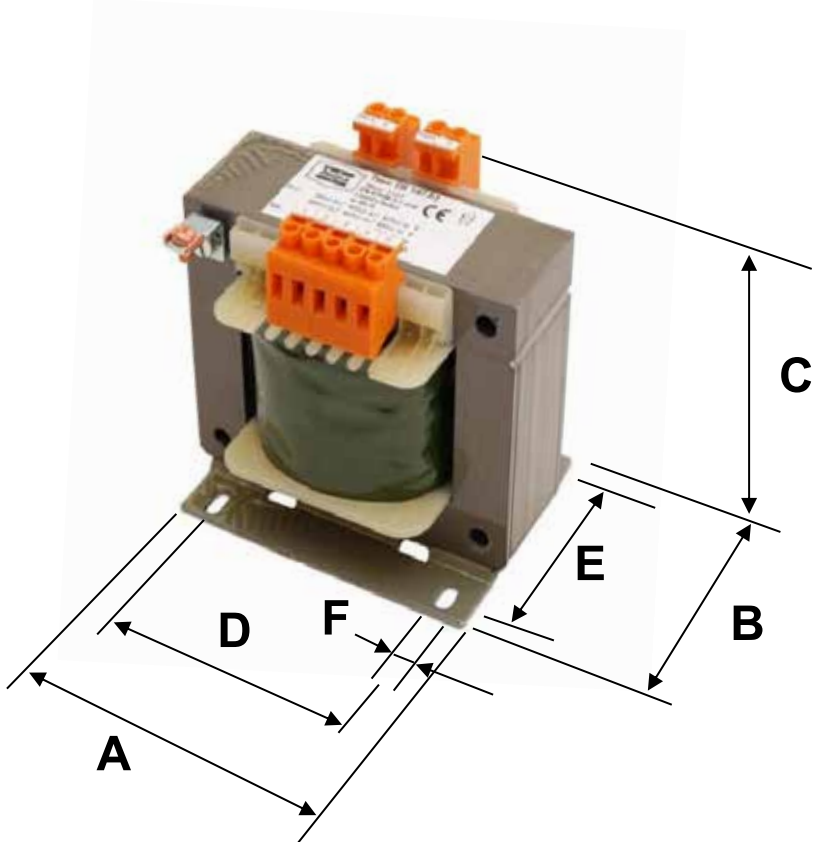

U pri	400/460 Volt AC, met +/- 20 Volt aanpassingsklemmen, 1 fase 50/60 Hz.								
U sec	2x115V	2x24V	Afmetingen						Gewicht
VA	Type No.		A	B	C	D	E	F	kg.
63	TR 197.09		84	60	92	72	38	4,8	1,4
100	TR 197.01		84	75	82	72	53	4,8	2,1
160	TR 197.02		96	86	103	84	64	5,6	3,0
250	TR 197.03		120	87	121	90	65	5,6	4,4
400	TR 197.04		120	118	121	90	96	5,6	9,6
630	TR 196.93		150	121	143	122	99	6,6	11,3
1000	TR 197.05		150	147	143	122	125	6,6	14,0
2000	TR 197.63		192	176	180	160	154	10,0	27,0
100		TR 197.06	84	75	82	72	53	4,8	2,1
160		TR 197.57	96	86	103	103	64	5,6	3,0
400		TR 197.48	120	118	121	90	96	5,6	9,6



CONTROLS SUPPLY CHAIN®
VALVES ACTUATORS INSTRUMENTATIONS