


1 FASE UNIVERSELE VEILIGHEIDS EN
BESCHERMINGSTRANSFORMATOREN VOLGENS EN 61558-2.6



U pri	230/400 Volt AC, 1 fase 50/60 Hz.									
U sec	24 V AC								230 V pri	400 V pri
		Afmetingen						Gewicht	afzekeren	afzekeren
VA	Type No.	A	B	C	D	E	F	kg.	met (A-T):	met (A-T):
25	TR 156.19.2	66	67	78	50	42	4,8	0,7	0,2	0,1
63	TR 156.20.2	78	71	87	56	45.5	4,8	1,2	0,4	0,2
100	TR 156.21.2	84	88	92	64	61	4,8	2,1	0,6	0,315
160	TR 156.22.2	96	90	103	84	70	5,6	2,9	1,0	0,5
250	TR 156.23.2	96	106	103	84	84	5,6	3,7	1,6	0,8
400	TR 156.24.2	120	100	121	90	80	5,6	5,3	2,5	1,25
630	TR 156.25.2	150	108	143	122	82	6,6	8,2	4,0	2,0

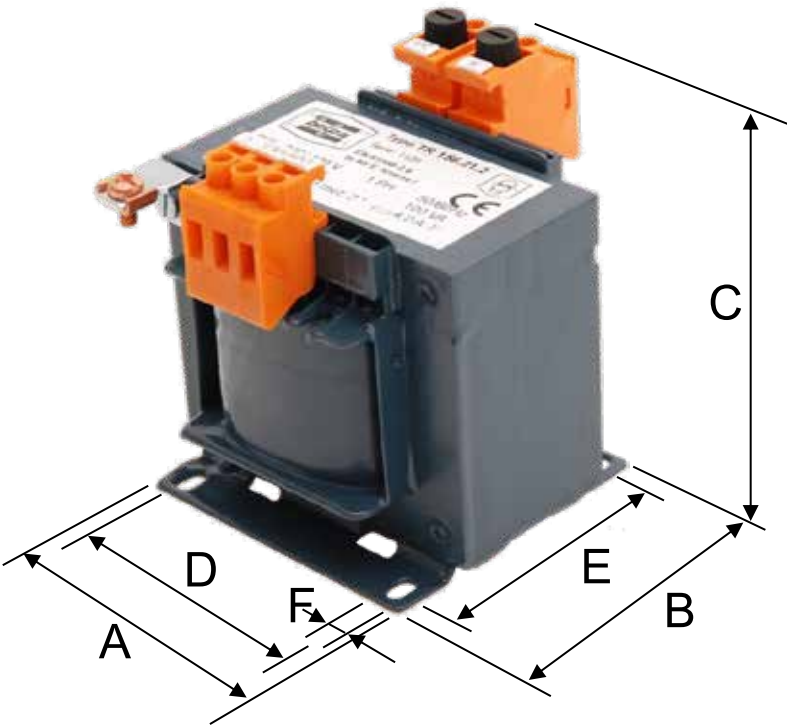