


1 FASE VEILIGHEIDS EN BESCHERMINGSTRANSFORMATOREN

VOLGENS en 61558-2.4 / -2.6



U pri	230 Volt AC, 1 fase 50/60 Hz.										
U sec	24 V	42 V	230 V								
Norm:	- 2.6	- 2.6	- 2.4	Afmetingen						Gewicht	afzekeren
VA	Type No.			A	B	C	D	E	F	kg.	met (A-T):
25	TR 172.63	TR 172.73	TR 172.81	66	67	78	50	42	4,8	0,7	0,16
63	TR 172.65	TR 172.74	TR 172.82	78	71	87	56	45.5	4,8	1,2	0,40
100	TR 172.66	TR 172.75	TR 172.83	84	88	92	64	61	4,8	2,1	0,50
160	TR 172.67	TR 172.76	TR 172.84	96	90	103	84	70	5,6	2,9	0,80
250	TR 172.68	TR 172.77	TR 172.85	96	106	103	84	84	5,6	3,7	1,25
400	TR 172.69	TR 172.78	TR 172.86	120	100	121	90	80	5,6	5,3	2,00
630	TR 172.70	TR 172.79	TR 172.87	150	108	143	122	82	6,6	8,2	3,15
1000	TR 172.71	TR 172.80	TR 172.88	150	165	155	122	125	6,6	14,1	5,00
1600											
2000											
2500											

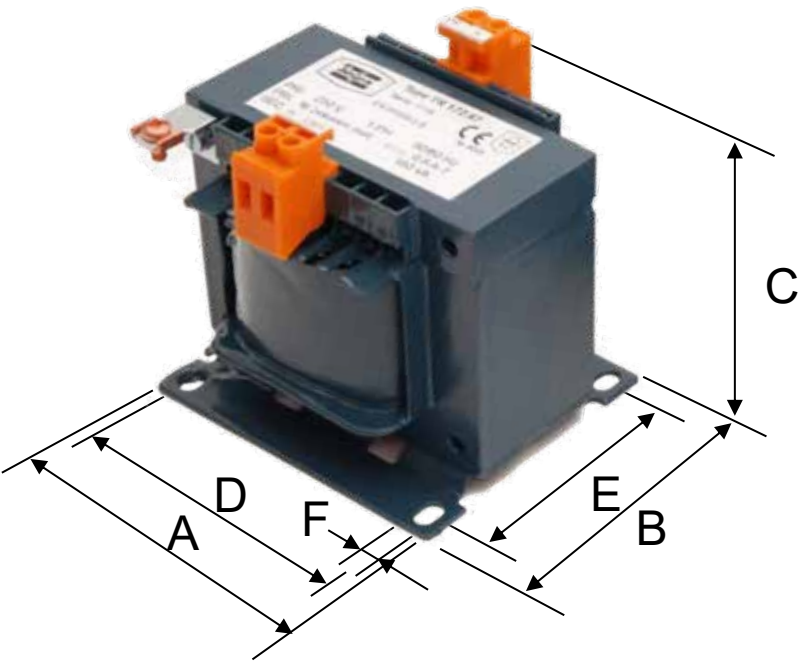

CONTROLS SUPPLY CHAIN®

VALVES ACTUATORS INSTRUMENTATIONS